

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**

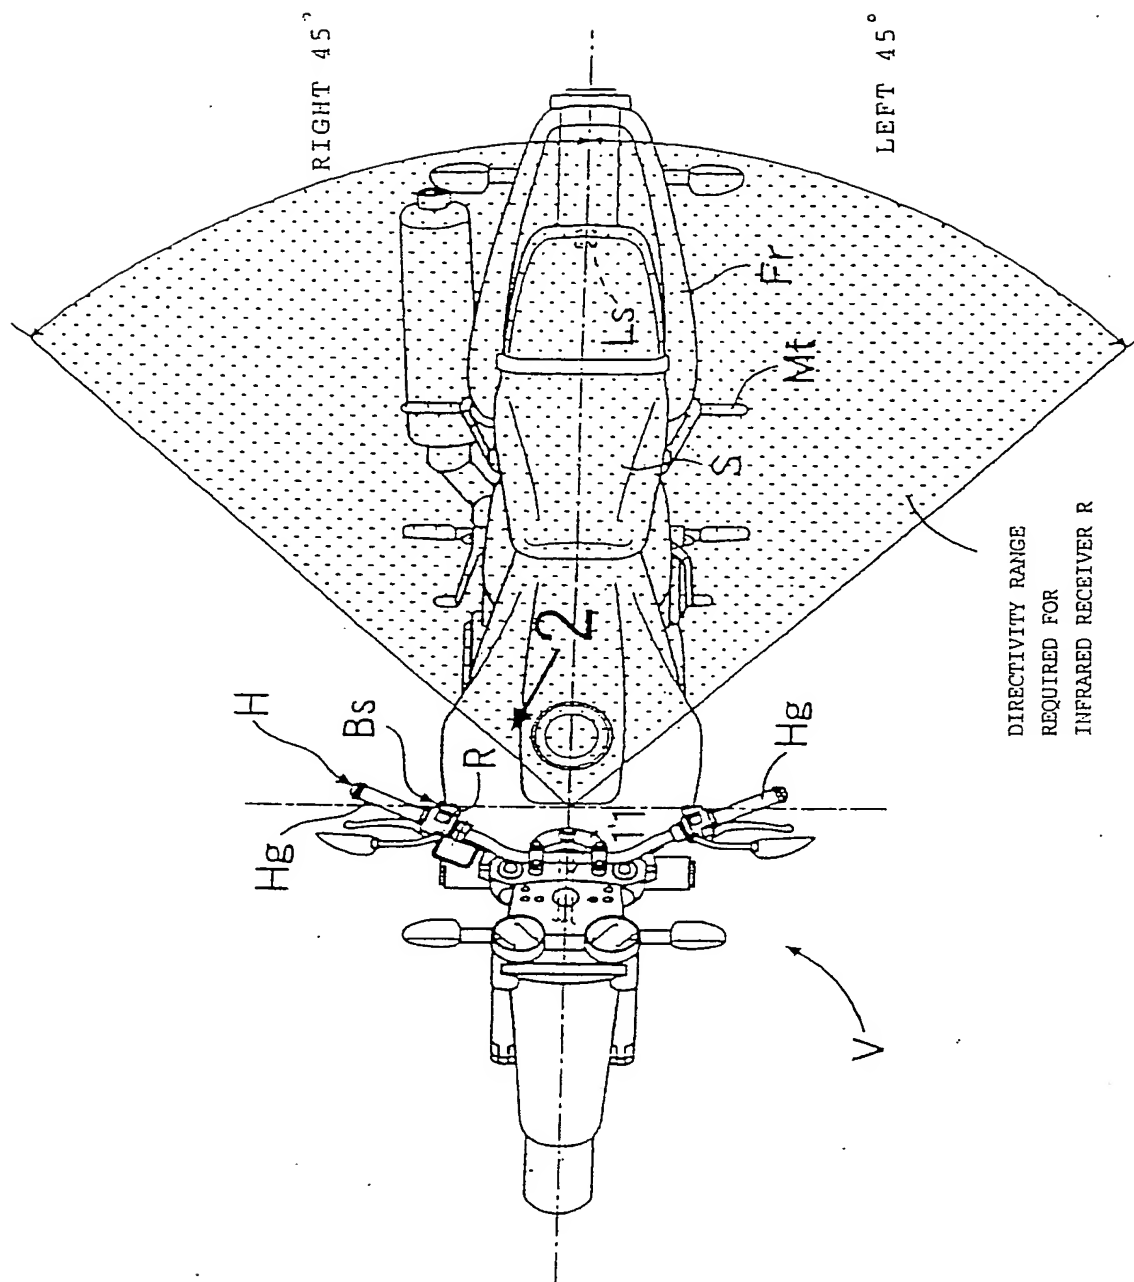


FIG. 1

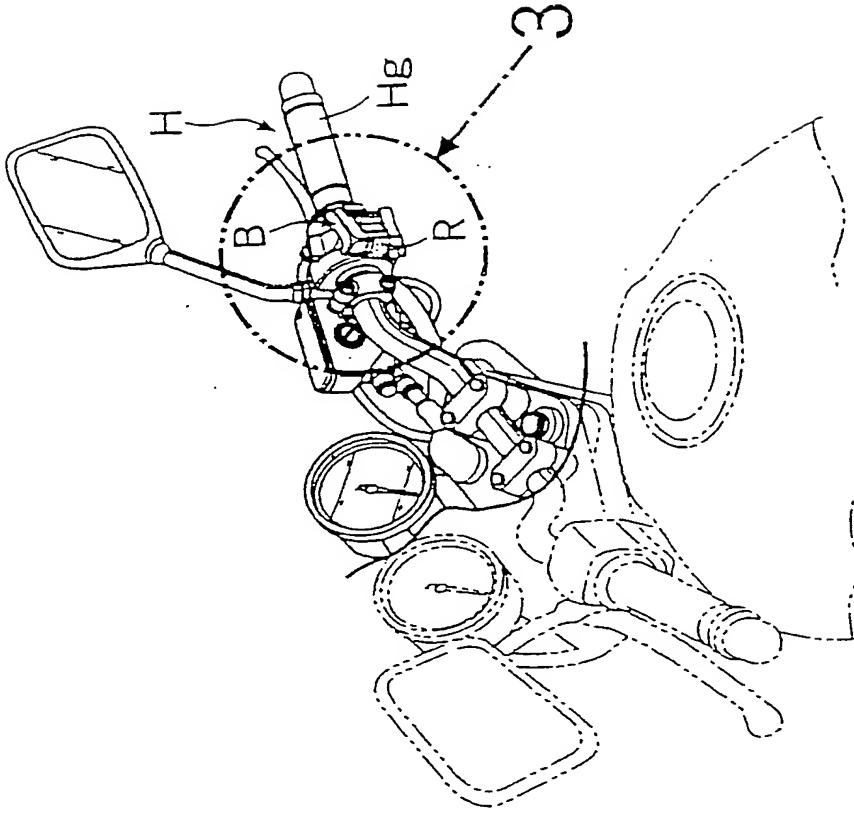


FIG. 2

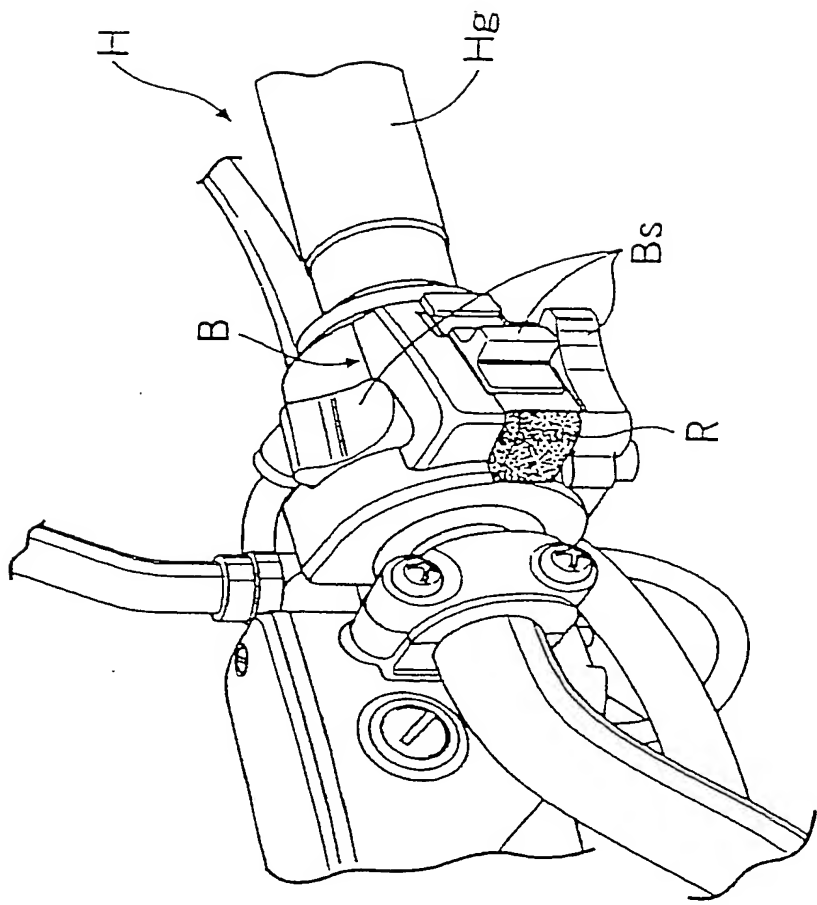


FIG. 3

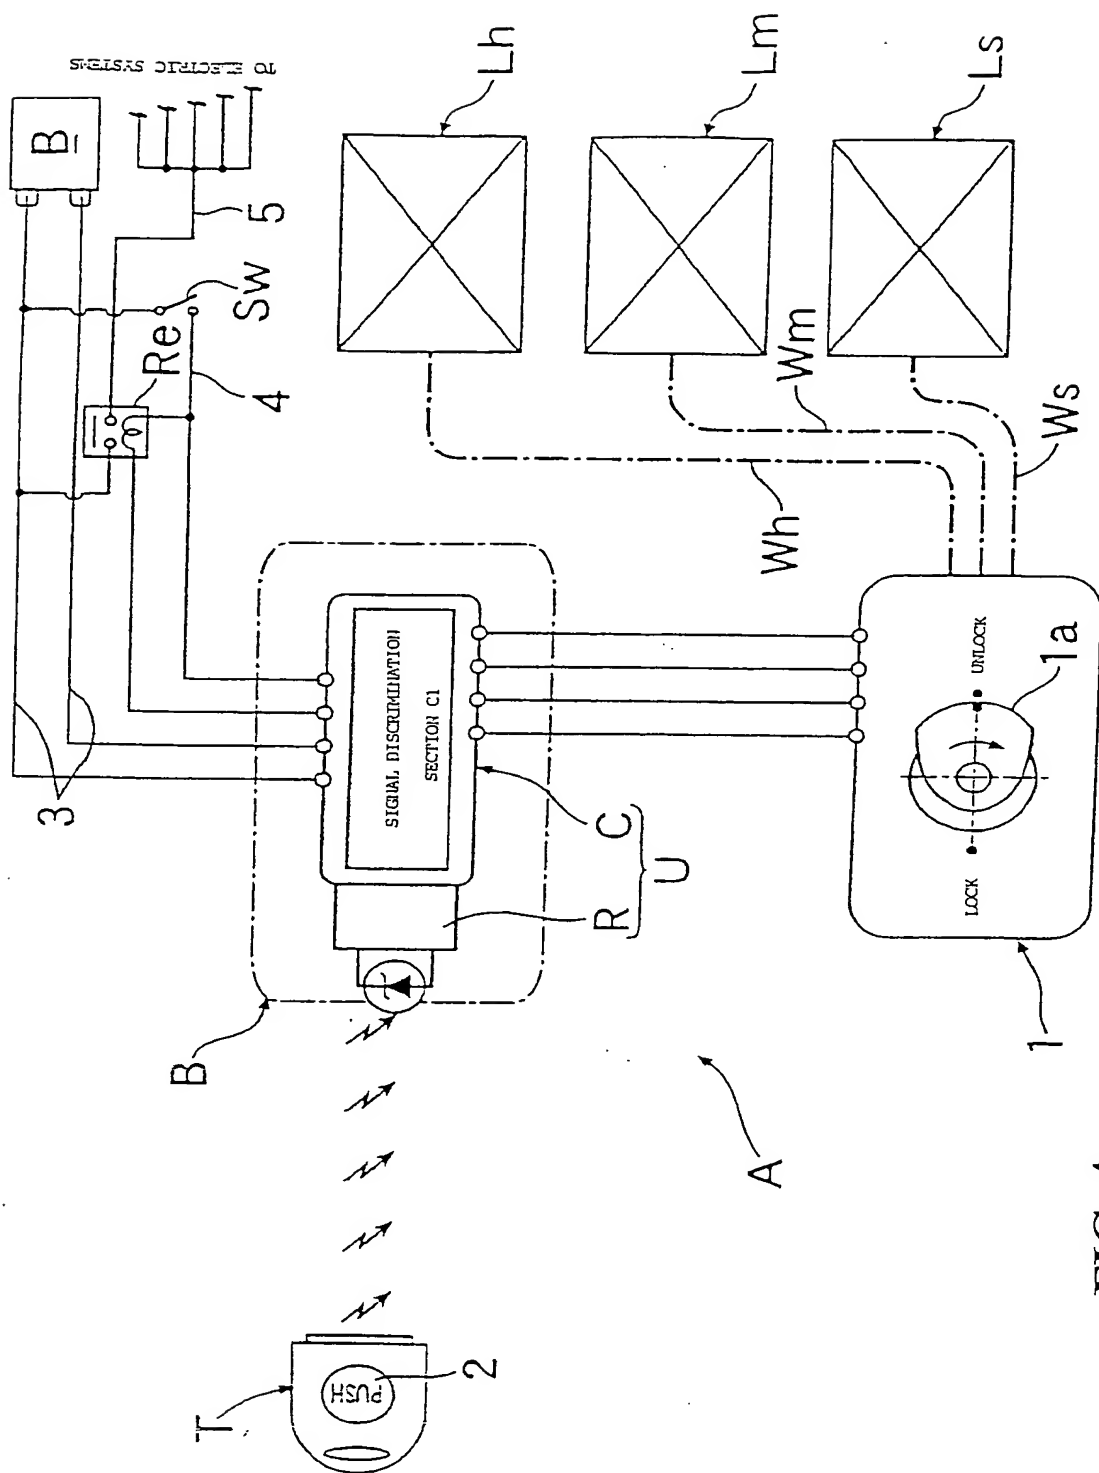


FIG. 4



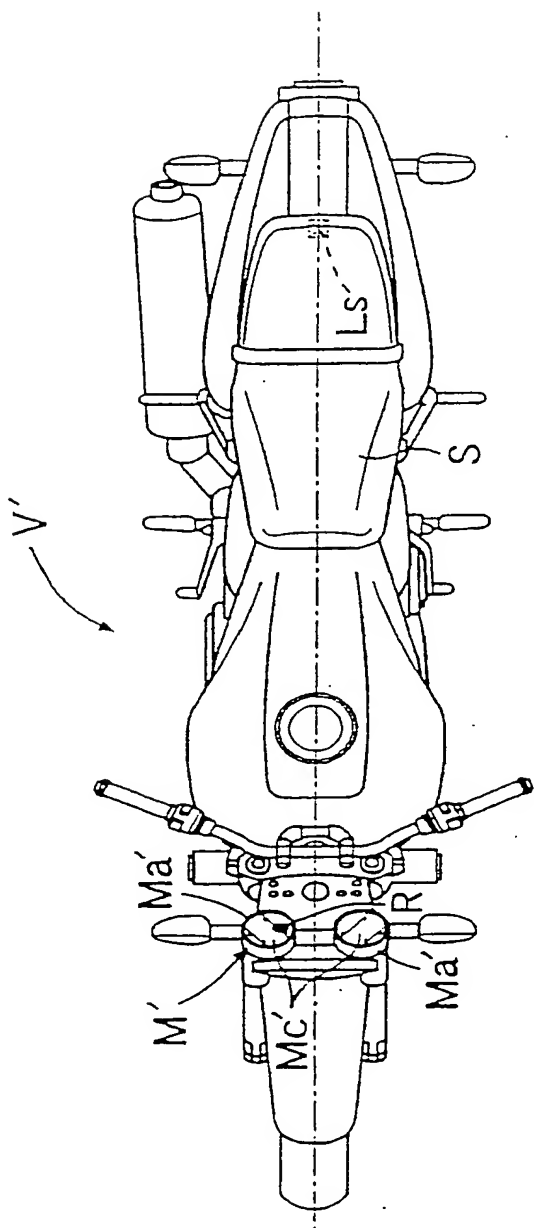


FIG. 6

FIG. 7 is a plan view of the infrared receiver R showing the directivity range required for the receiver R. The receiver R is shown in cross-section with various components labeled. The directivity range is indicated by a shaded area extending from the receiver R. The labels include Wf, Ff, Hc, H, ST, M, Hg, R, Hg, S, LS, Fr, V, Right 45°, and Left 45°.

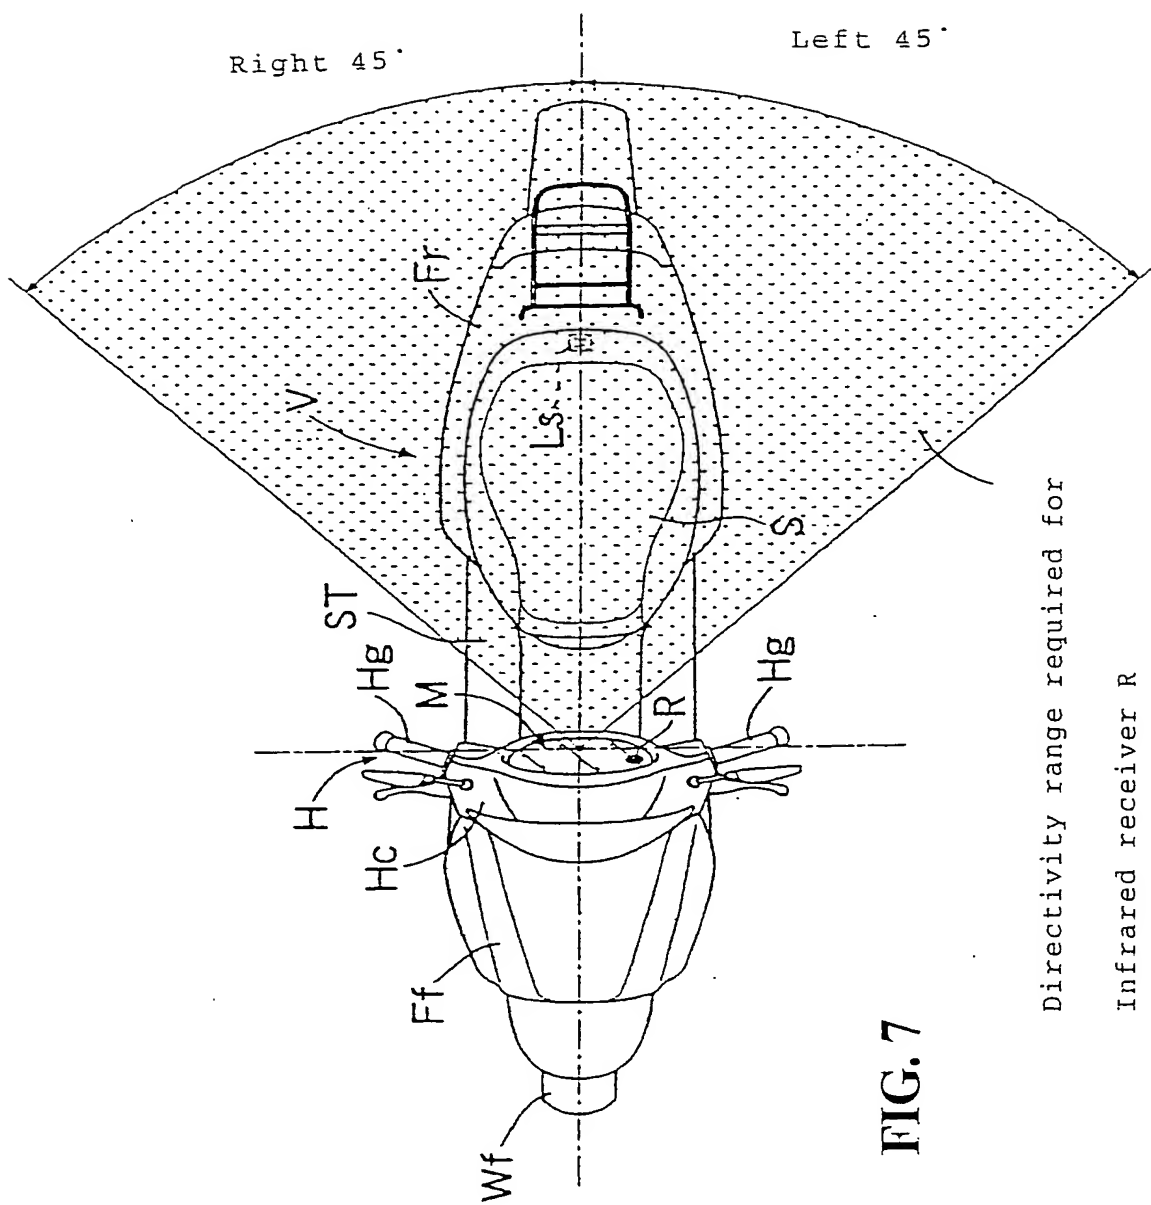


FIG. 7

Directivity range required for  
Infrared receiver R



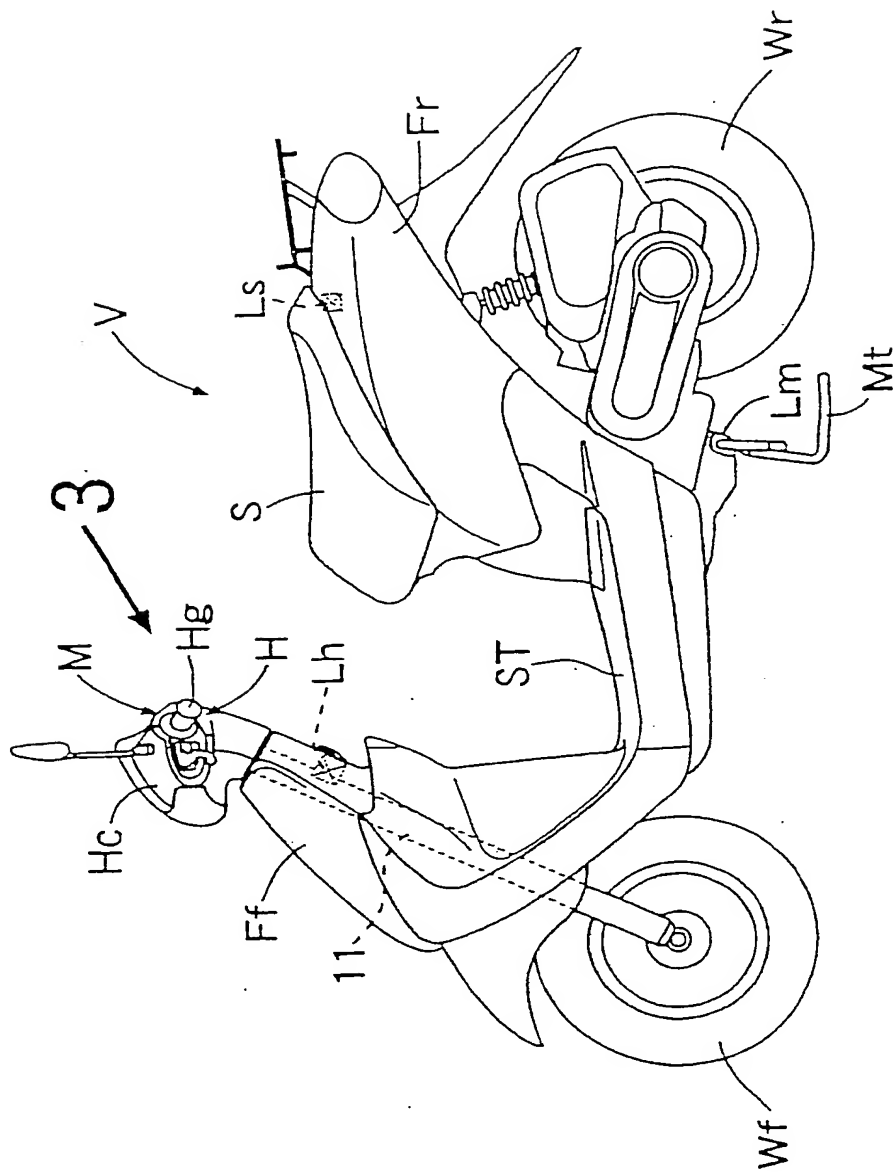


FIG. 8

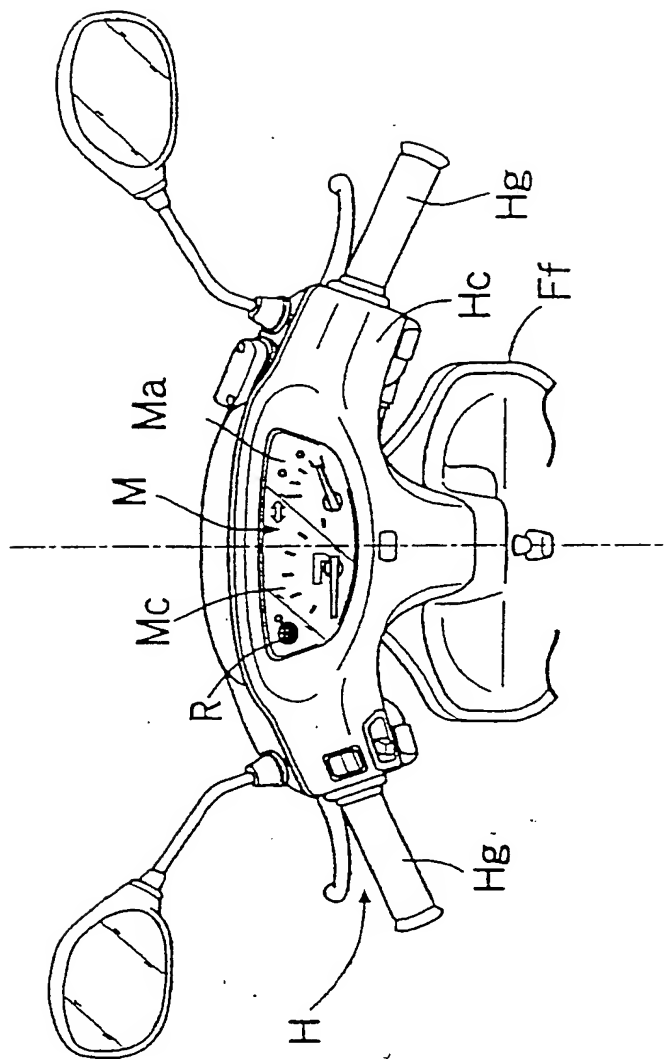


FIG. 9

To electric systems

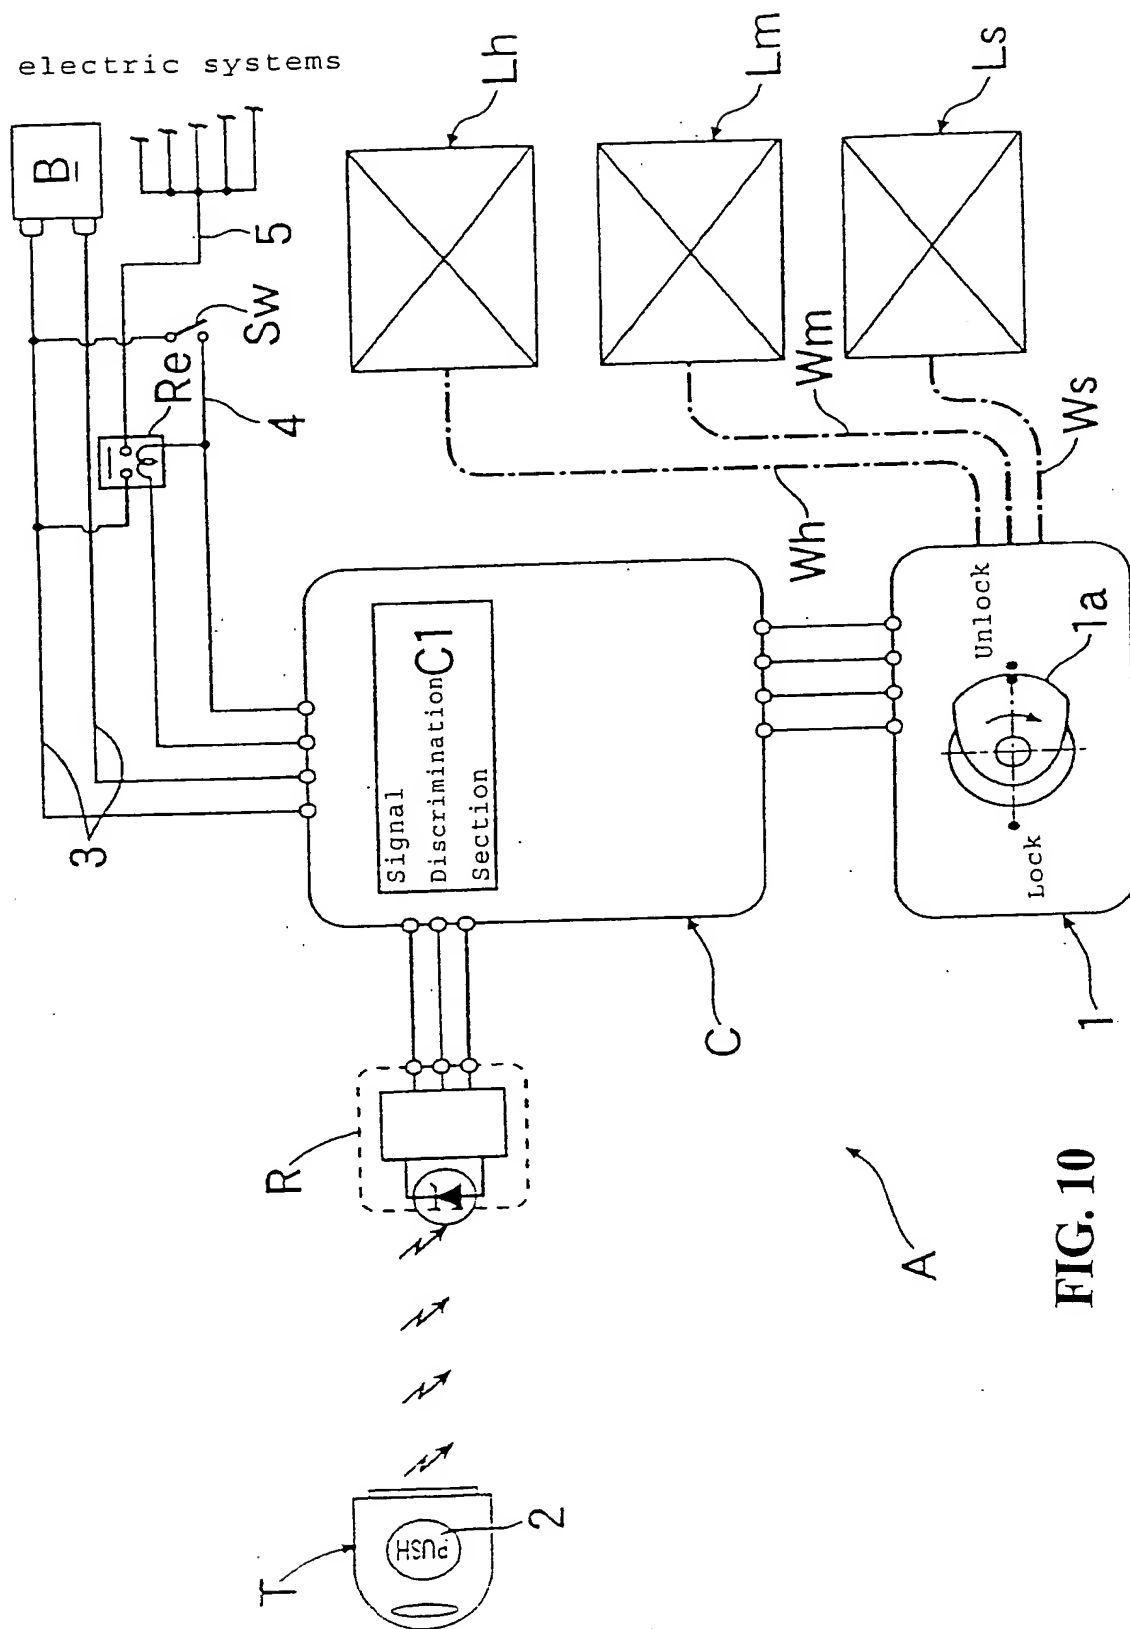


FIG. 10